
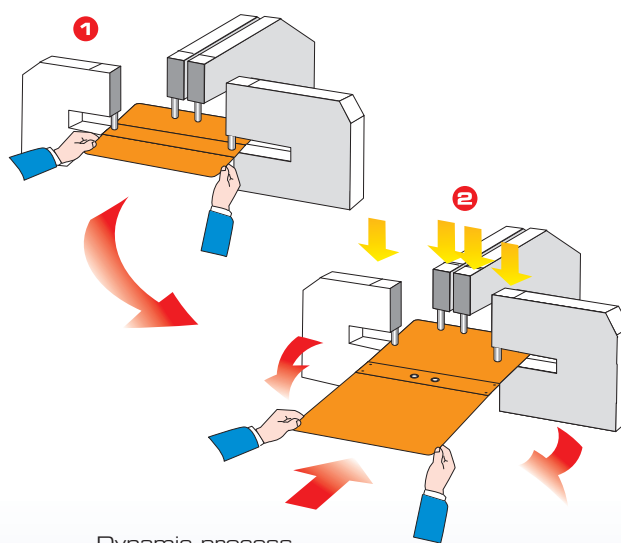
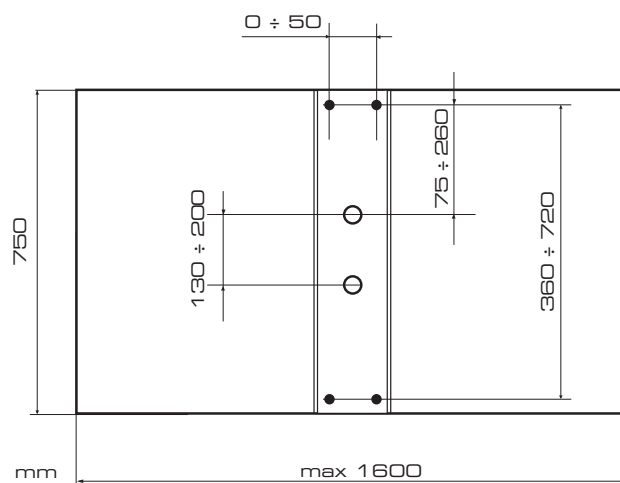


Macchina speciale per montaggio copertine per campionari

Macchina elettro-pneumatica a quattro teste, per l'applicazione simultanea di due occhielli centrali (per inserimento capocorda maniglia) più due o quattro rivetti autoperforanti laterali (a interasse variabile) per il sostegno del cavallotto. Profondità teste centrali 850 mm e teste laterali 160 mm.

Special machine to assemble covers of sample books

Electro-pneumatic machine with four heads for simultaneous application of two central eyelets (for inserting the cord-handle) and of two or four self piercing lateral rivets (at adjustable distance). The throat depth of central heads is 850 mm and of the lateral heads is 160 mm.

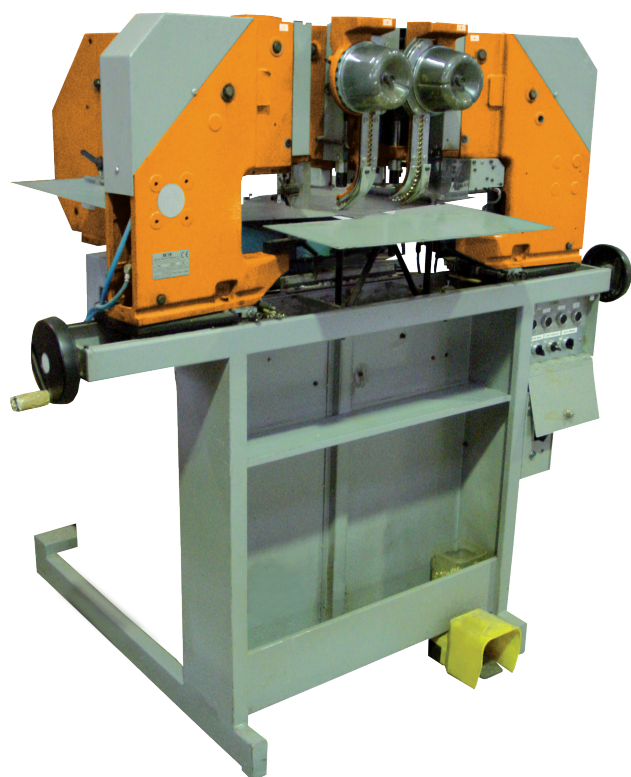

Dynamic process

- Occhielli/Rivetti: A richiesta
- Spessore cartone: da 0,5 mm a 3 mm
- Produzione: 8 pezzi/minuto*
- Voltaggio: 220 Volt monofase
- Consumo pneumatico: 18 NL/ciclo (6 bar)
- Dimensioni: L= 1550 mm; P= 1500 mm; H= 1500 mm.
- Peso: Kg. 480

- Eyelets/Rivets: On request.
- Cardboard thickness: 0,5 mm to 3 mm
- Capacity: up to 8 pieces/minute*
- Voltage: 220 Volt single-phase
- Compressed air: 18 NL/cycle (6 bar)
- Overall dimensions: L= 1550 mm; P= 1500 mm; H= 1500 mm.
- Weight: Kg. 480

* Production capacity of every machine depends on sizes, type of materials, glues and operator skill
IML reserves the right to change technical specifications without notice.