

B 122




IML
MACHINERY

Macchina rivettatrice/occhiellatrice pneumatica a due teste regolabili

Macchina predisposta per l'applicazione contemporanea di due rivetti/occhielli per il fissaggio di prodotti vari su cartelline ecc... Distanza minima di regolazione 60 mm max 400 mm. (A richiesta è possibile ordinare anche nella versione elettrica).

Pneumatic riveting/eyeleting machine with two adjustable heads

The machine is designed for the application of two rivets/eyelets for the fixing of various products on folders etc. at the same time. Minimum distance adjustment 60 mm max 400 mm. (It is also possible to order in the electric version on request).

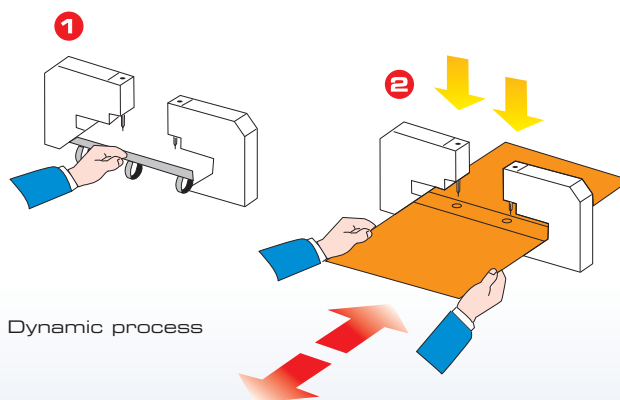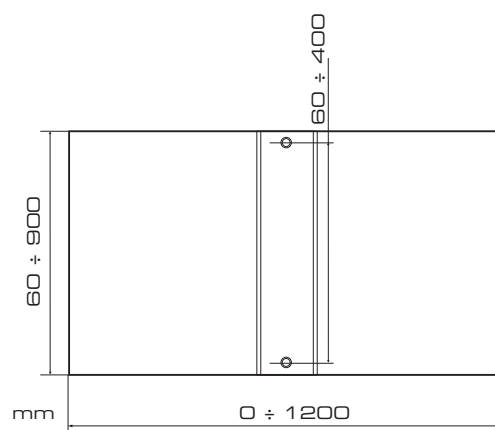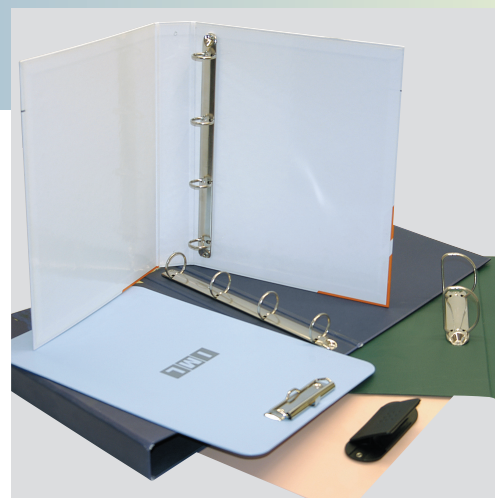

- Occhielli/Rivetti: A richiesta.
- Spessore cartone: da 0,5 a 4 mm.
- Produzione: circa 12 pezzi/minuto*.
- Consumo pneumatico: 5 NL/ciclo (a 6 bar).
- Dimensioni: L= 1500 mm; P= 1000 mm; H= 1500 mm.
- Peso: Kg. 250

- Eyelets/Rivets: On request.
- Cardboard thickness: min. 0,5 max. 4 mm.
- Capacity: up to 12 pieces/minute*.
- Compressed air: 5 NL/cycle (pressure 6 bar).
- Dimensions: L= 1500 mm; P= 1000 mm; H= 1500 mm.
- Weight: Kg. 250

* Production capacity of every machine depends on sizes, type of materials, glues and operator skill
IML reserves the right to change technical specifications without notice.