

# OM 13




**IML**  
MACHINERY

## Macchina pneumatica per il montaggio simultaneo dei due paralati su classificatori

La macchina ha la possibilità di applicare i due paralati simultaneamente sul classificatore, il paralato dovrà prima essere posizionato sul dorso della cartella, a mano dall'operatore e poi schiacciato.

## Pneumatic machine for simultaneous assembling of two metal edge protectors on files

The machine can apply the two metal edge protectors on the file simultaneously. The metal protections must be positioned on the edges of the folder manually by the operator and then fixed by the machine.

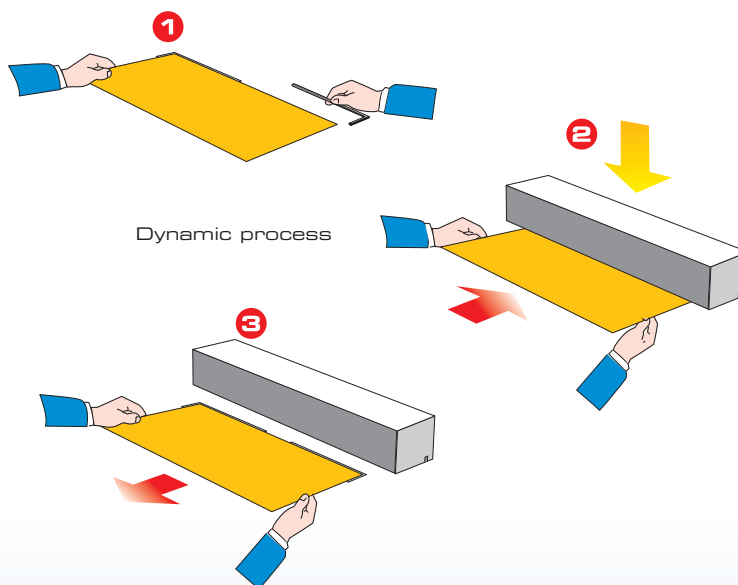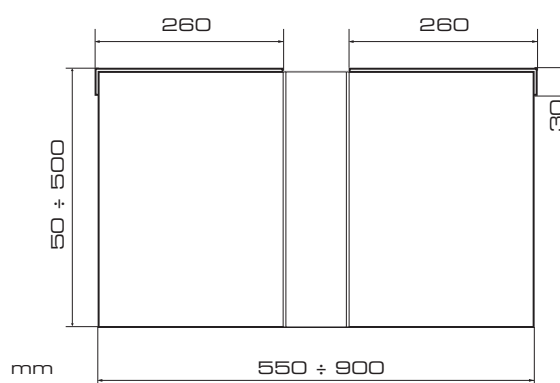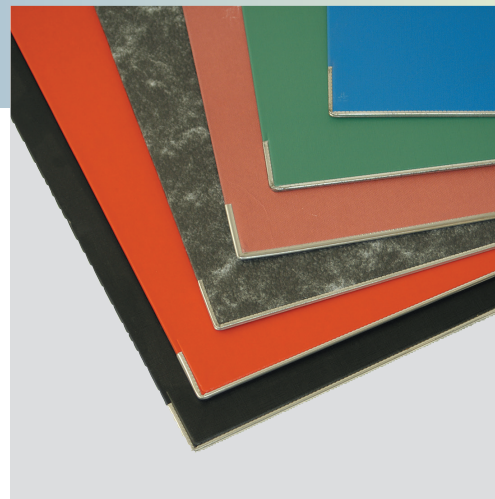

- Materiale utilizzato: Cartone rivestito, Fibrone o similari.
- Misura paralato: A richiesta.
- Spessore cartone: da 1,5 a 2,8 mm.
- Produzione: 500 pezzi/ora\*
- Consumo pneumatico: 8 NL/minuto (6 bar)
- Dimensioni: L= 900 mm; P= 460 mm; H= 1000 mm.
- Peso: Kg. 110

- Used Material: Coated board, Fiber boards or similar.
- Edge protector size: On request.
- Cardboard thickness: 1,5 to 2,8 mm.
- Capacity: 500 pieces/hour\*
- Compressed air: 8 NL/minuto (6 bar)
- Dimensions: L= 900 mm; P= 460 mm; H= 1000 mm.
- Weight: Kg. 110

\* Production capacity of every machine depends on sizes, type of materials, glues and operator skill  
IML reserves the right to change technical specifications without notice.