

MS 1






Pressa senza caricatori

Macchina senza caricatore per lavorazioni manuali, predisposta per l'uso di punzoni standard (viene fornita senza punzoni d'applicazione). Disponibile con profondità 160 - 260 - 500 e 850 mm.

Press without feeders

Machine without feeders for manual setting. Prepared for standard tools (supplied without fixing tools). Available with throat depth 160 - 260 - 500 and 850 mm.

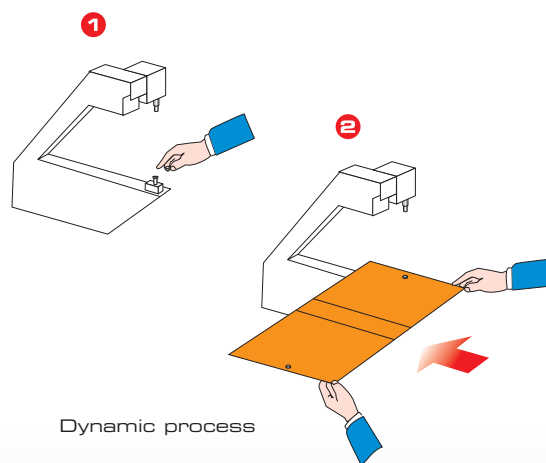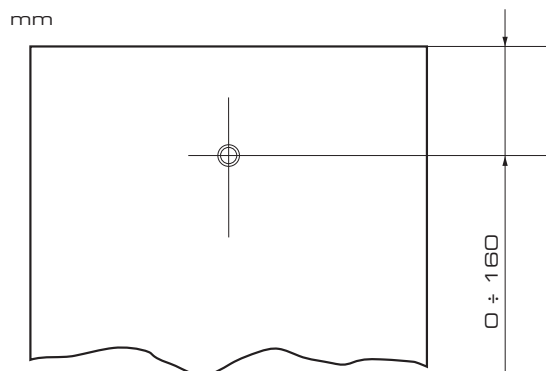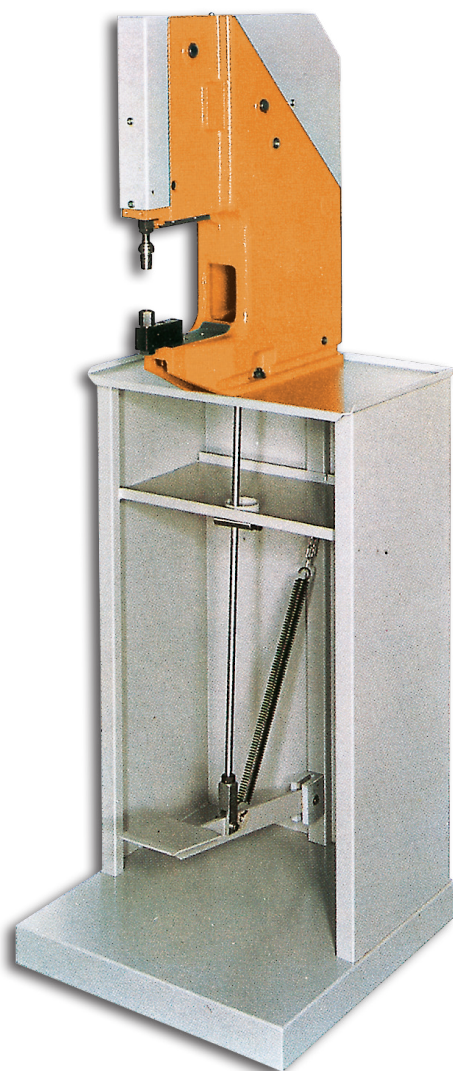

Dynamic process

CARATTERISTICHE TECNICHE TECHNICAL DATA

	A PEDALE BY FOOT-PEDAL	PNEUMATICA BY PNEUMATIC CYLINDER				A MOTORE ELETTRICO BY ELECTRIC MOTOR			
- Profondità/Throat depth: mm	160	160	260	500	850	160	260	500	850
- Misure d'ingombro/Measurement: cm	45x50x136	45x50x136	45x60x140	45x90x145	45x120x150	45x50x136	45x60x140	45x90x145	45x12x150
- Pesì/Weights: Kg	50	50	58	80	120	70	78	95	135
- Tempi di ciclo/Working cycle:	-	-	0,6 sec			-	0,35 sec		
- Consumi/Consumptions:	-	-	3 NL/CYCLE/6 BAR			-	400 W 380 V - 3 ~		

* Production capacity of every machine depends on sizes, type of materials, glues and operator skill
IML reserves the right to change technical specifications without notice.